


Technical Specifications:

MODEL	CAPACITY IN LPH	SPM	Pressure In kg/cm ²	MOTOR	DIMENSIONS IN mm							
					A	B	C	D	E	F(+10)	G	H(+30)
GRM 70	5	25	10	0.25 HP	90	70	78	128	75	95	1/2"	410
	8	50	10	0.25 HP	90	70	78	128	75	95	1/2"	410
	15	75	10	0.25 HP	90	70	78	128	75	95	1/2"	410
	20	100	10	0.25 HP	90	70	78	128	75	95	1/2"	410
	30	150	10	0.25 HP	90	70	78	128	75	95	1/2"	410
GRM 102	35	175	10	0.25 HP	90	70	78	128	75	95	1/2"	410
	20	25	6	0.25 HP	90	70	78	128	75	110	1/2"	410
	45	50	6	0.25 HP	90	70	78	128	75	110	1/2"	410
	65	75	6	0.25 HP	90	70	78	128	75	110	1/2"	410
	90	100	6	0.25 HP	90	70	78	128	75	110	1/2"	410
GRM 132	140	150	6	0.5 HP	90	70	78	128	75	110	1/2"	410
	165	175	6	0.5 HP	90	70	78	128	75	110	1/2"	410
	60	25	6	0.25 HP	90	70	78	128	75	150	1"	410
	120	50	6	0.25 HP	90	70	78	128	75	150	1"	410
	180	75	6	0.25 HP	90	70	78	128	75	150	1"	410
GRM 132	250	100	6	0.5 HP	90	70	78	128	75	150	1"	410
	375	150	6	0.5 HP	90	70	78	128	75	150	1"	410
	400	175	6	0.5 HP	90	70	78	128	75	150	1"	410

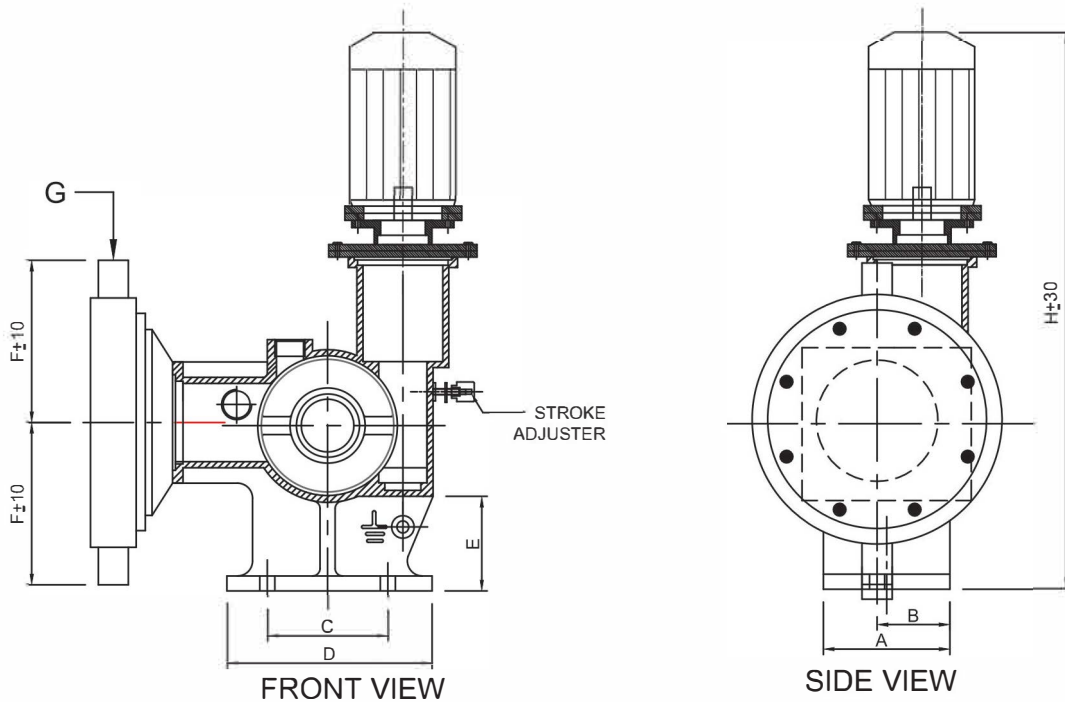

Material of construction of wetted parts:

- SS304, 316, 304L, 316L, • Hastalloy, Alloy 20 • Polypropelene • PTFE.

Always think ^{of} Positive

